

# FRP-75/R60

## movable glass door with frame & parking

### PARKING SYSTEM




INAL® Framed Parking System FRP-75/R60 with middle size aluminum rail, 52 mm x 59 mm with **embedded stainless steel rod & stainless steel rollers**. Special designed aluminum profiles create a strong frame for a variety of glass such as tempered up to 12mm, laminated up to 6+6, double glazing with a total thickness of up to 18mm. High resistance female & male vertical profiles for the maximum weather proofing between framed panels in combination with adjustable side aluminum case profiles. Ability to create swing door panel with overhead concealed door closer in intermediate sections of openings (FRP75/R60 SOC). Locking with eurocylinder or front bolts.


## technical specifications

Glass Type	Double glazing Tempered or Laminated
Glass thickness	max 18mm
Panel weight	max 75kg
Maximum panel width	0,90m
Maximum opening height	2,80m
Type of FRP-75/R60 System	Front Locking
Finishing	Natural anodized, Satin anodized, RAL powder coating
Without floor guide, No glass cuttings required	

### PANEL STORAGE/PARKING APPLICATIONS

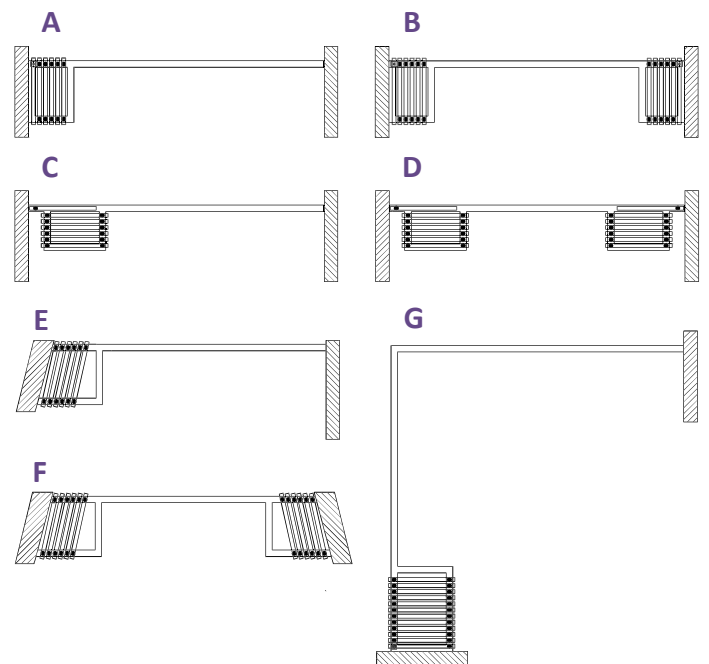

MULTIPLE CHOICES DEPENDING ON YOUR NEEDS

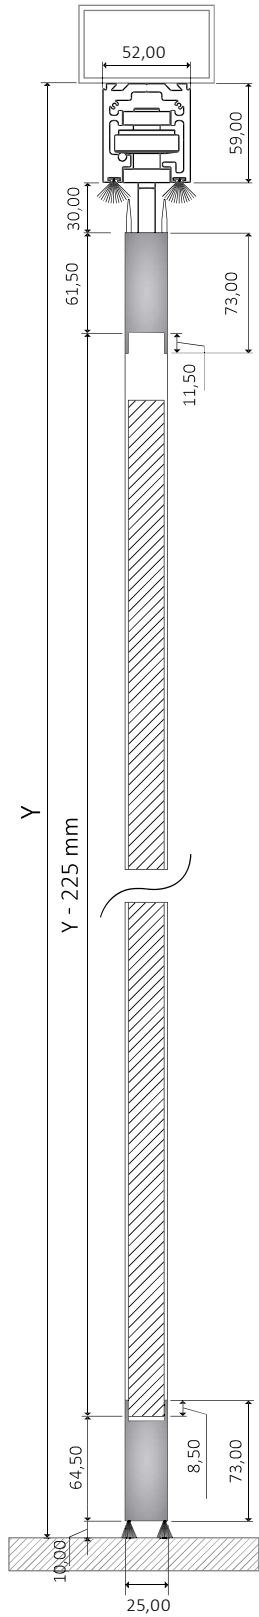

Aluminum middle size rail  
52x59 with embedded  
stainless steel rod.



INTERMETAL SA PATENT




Stainless steel  
roller PR150 with  
frame support.



Parking area for the storage of the panels.



High resistance female & male vertical profiles  
for the maximum weather proofing between  
framed panels.



**NO FLOOR GUIDE  
REQUIRED**

**NO GLASS CUTTINGS  
REQUIRED**

## locking options

### FRONT LOCKING



Lock  
mechanism  
with  
eurocylinder



Internal  
locking bolt.



With additional lock to  
the vertical profile.

**GLASS (TEMPERED OR LAMINATED OR DOUBLE GLAZING) DIMENSION CALCULATION**

Glass height (mm) = **Y - 225mm**, ( Y = from the bottom of the steel beam)